# **LEXRON Provides Safe and Efficient LFP Battery Solutions.**

LXR series adopt best value LiFePO4 cells, with the BMS system independently designed by LEXRON. series and parallel use, is energy storage, marine and other fields. IP65 protection, support an ideal choice for outdoor, small

### **Features**

- Safest lithium battery technology
- Lithium iron Phosphate Battery(LiFePO4)
- Eco-friendly
- Special protection plate
- Multiple safety protection
- Intelligent balancing function
- 20 Years Designed service life

## **Mechanical Specifications**

Case Material ABS

Cell Type-Chemistry Prismatic LiFePO4

Terminal Type M8

IP Grade IP65

### **BMS Characteristics**

Recommended Charge Current 50A

Maximum Charge Current 50A

Maximum Continuous Discharge Current 50A

Recommended Charge Voltage 51~51.75V

Max Charge Voltage 54.75V

Overcharge Protection Voltage 59.2~60.8V

Charge Mode CC/CV

Discharge Cut-off Voltage 44.8V

## **Basic Performance**

Nominal Voltage 48V

Nominal Capacity 100Ah

Standard Discharge Time 100A@60min

Capacity 4.8KWh

IR  $\leq 10 \text{m}\Omega$ 

Self Discharge <=2%/Month

Cells Square 100Ah

Cycle Life 3500 times(1C/1C)

Size (mm) 522\*238\*223

Weight (kg) 36.0



## **Charge Performance**

Rated Charge Current 50A

Maximum Charge Current 100A

Rated Charge Voltage 51~51.75V

Charge Cut-off Voltage > 54.75V(0.5~1.5S)

Reconnect Voltage < 57.6V

Balancing Voltage > 51V

System Series NO

## **Discharge Performance**

Rated Discharge Current 50A

Pulse Current(<=5S) 600A

Rated Discharge Cut-off Voltage 42V

Minimum Discharge Cut-off Voltage >40V

Short Circuit Protection 200~600 µs

Short Circuit Current Approx. 2000A

>37.5V

### **Temperature Performance**

Discharge Temperature -20~60°C

Charge Temperature -20~60°C

Storage Temperature -30~60°C

High Temperature Cut-off 65°C

Reconnect Temperature 48°C


### Compliance

**Reconnect Voltage** 

Certifications CE/UN38.3/UL1642/IEC62133


Transport Appraisal UN3480,CLASS 9


#### Size







# **Characteristics Curve**

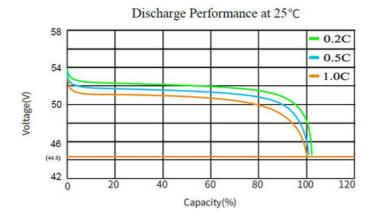

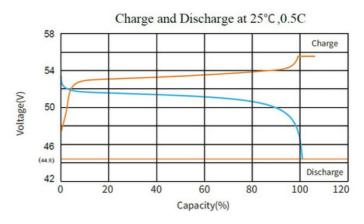

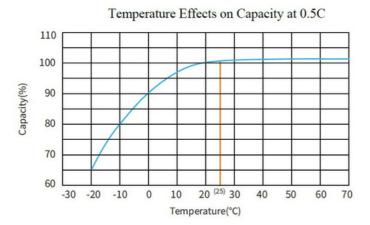

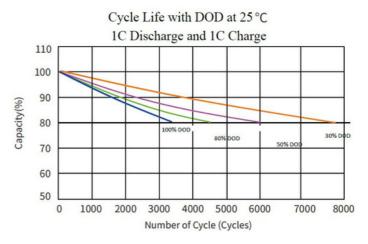

### **Cautions**

- 1. Do NOT short circuit, crush or disassemble.
- 2. Do NOT heat or incinerate.
- 3. Do NOT immerse in any liquid.
- 4. Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
- 5. Disconnect charging source prior to connecting or disconnecting battery terminals.
- 6. Do not dispose of batteries in a fire as they can explode.
- 7. Do not open, alter, or mutilate batteries.
- 8. Do not mix different types and brands of lithium-ion batteries.
- 9. Do not dispose in trash, follow local regulations and manufacturer's instruction.
- 10. See installation instructions before connecting to the supply.
- 11. The battery cabinet receives power from more than one source. Disconnection of all DC sources is required to De-energize this unit before installing or servicing. Wait 5 minutes before opening the unit.
- 12. Do not install on or over combustible surfaces.





ACS ENERJI